


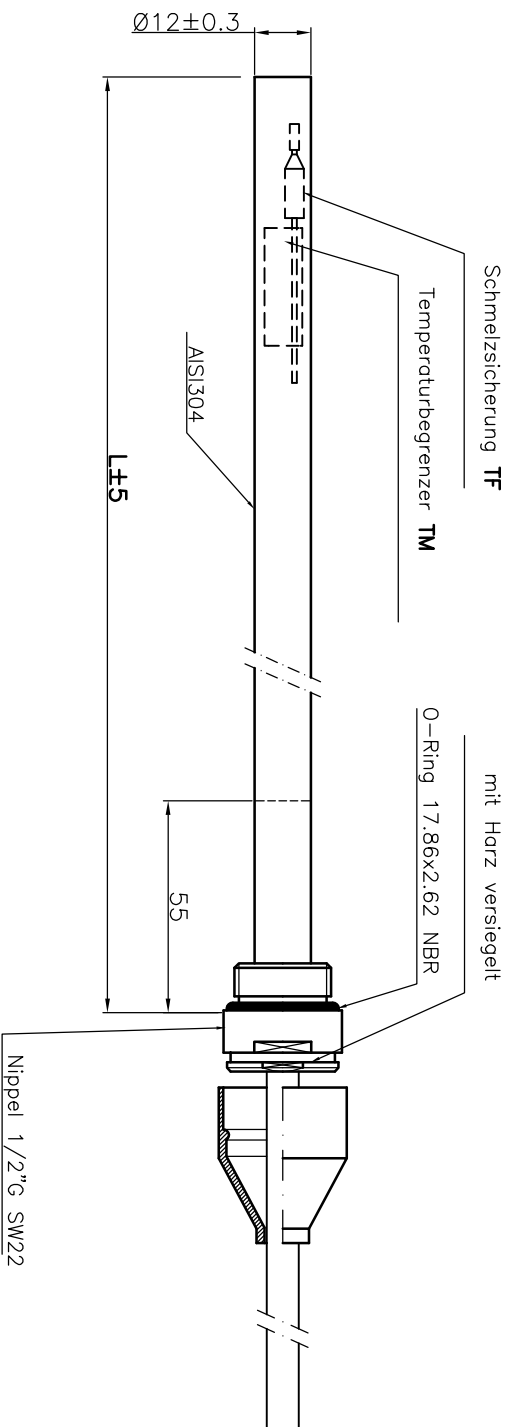

Watt: <u>W</u> +5% -10%	Elektrische Prüfungen (bei 20°C±5)	CEI 61-150/EN 60335-1
Volt: <u>230</u>	Durchschlagfestigkeit :	<u>1250</u> (Volt x 1')
W/cm ² _____	Isolationswiderstand :	<u>5</u> (MOhm bei 500Vgs)
	Erde Leistung :	<u>0.1</u> (Ohm)
	Schutzart :	<u>IP64</u>

Code	W	L	W/cm ²	TM [°C]	TF [°C]
LT43440	600	550	3.9	90	152
LT43441	300	350	3.9	90	152
LT43442	900	710	3.9	90	152